




Doosan M0617

Ideal for operating multiple tasks or long-range tasks

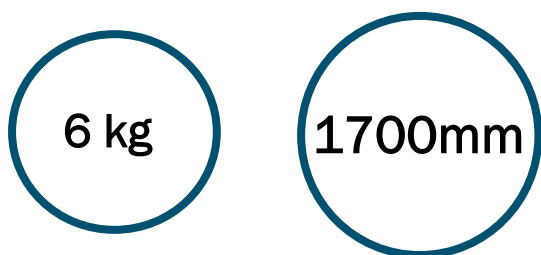


► State-of-the-Art | Controller

- Top-notch control platform for perfect and reliable robot control
- Maximize performance of torque sensor through innovative and advanced motion control algorithm and robot language
- Providing the latest communications technology to ensure compatibility with other automation environment
- Icon-based Skills* for easy and simple teaching of complicated robot motions



Robust platform with Real-time OS and 1msec. communication speed of EtherCAT, ensuring perfect performance even in tough environments

* Ethernet, Fieldbus, Serial, Wifi, etc.



Easy and simple robot teaching by various types of Skills and Templates

► Human-Centered | Teach Pendant

- Capacitive touch and high resolution 1280x800 screen for friendly user experience
- Light-weight and ergonomic design enabling inherently-comfortable grip
- Ultra-intuitive usability by simple graphic-informative communication



Intuitive Card View to monitor all information on robot operation environment at a glance



Simple and easy robot teaching with icon drag-and-drops



Doosan M0617

Performance

Degrees of freedom	6
Rated payload	6kg
Max.reach	1,700mm
Tool speed	1m/s
Repeatability	± 0.1mm
Temperature	0-45°C


Joint Movement

J1 Range / Speed	±360° / 100°/s
J2 Range / Speed	±360° / 100°/s
J3 Range / Speed	±165° / 150°/s
J4 Range / Speed	±360° / 225°/s
J5 Range / Speed	±360° / 225°/s
J6 Range / Speed	±360° / 225°/s

Other Features

Weight	34kg
Installation position	Any (Floor, ceiling, wall)
Protection Rating	IP54
Digital I/O – flange	6 In / 6 Out
I/O power supply	DC 24V/ Max. 3A

* The above specification is subject to change without prior notice.

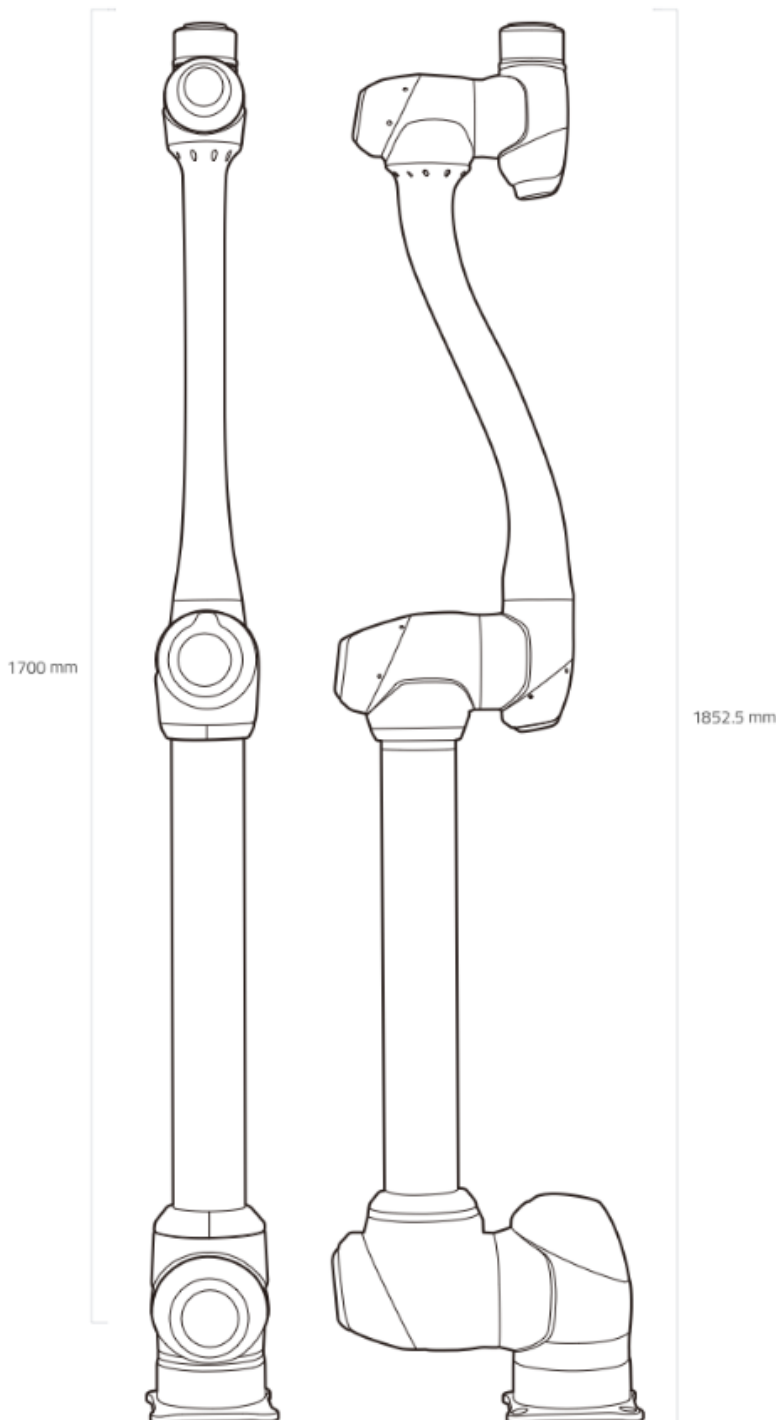




Doosan M0617

Arm

Controller

Teach Pendant

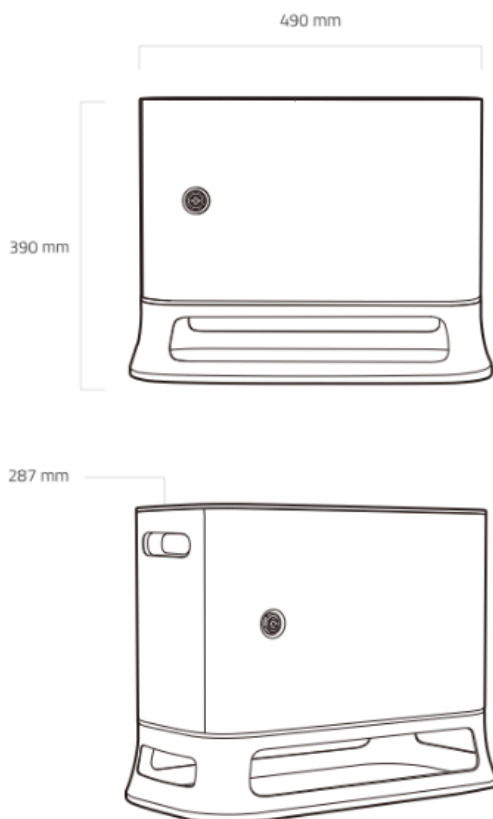

Basic

Interfaces	Ethernet / Wifi / RS232 / Modbus / Ethernet TCP/IP
Dimensions	490 x 390 x 287 mm
Weight	9 kg
Protection Rating	IP20

Other Features

I/O Port – Digital I/O	16 / 16
I/O Port – Analog I/O	2 / 2
I/O power supply	DC 24 V
Fieldbus	Modbus
Rated supply voltage	100~240(50~60Hz) VAC

* The above specification is subject to change without prior notice.




Doosan M0617

Arm

Controller

Teach Pendant

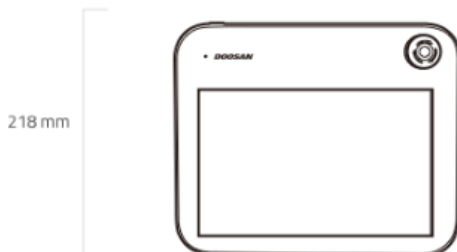

Basic

Protection Rating	IP20
Dimensions	264 x 218 x 42 mm
Weight / Screen Size	0.8 kg / 10.1 inch
Cable Length	4.5 m

* The above specification is subject to change without prior notice.



Doosan M0617

VALUE ADDING *of the* COBOT

DM0617-01

Value-Adding | Enhancer

Direct Control Unit : Cockpit

The optimal option to maximize user experience enables you to select a wide range of teaching modes and save coordinates with a simple five-button operation.




DM0617-02

Value-Adding | Enhancer

Dress Pack

Organizes various cables connected to the end tools of the robot allowing efficient operation. Integrated tube bracket and holder ensures convenient organization, and it is easy to attach/detach and relocate on the robot.

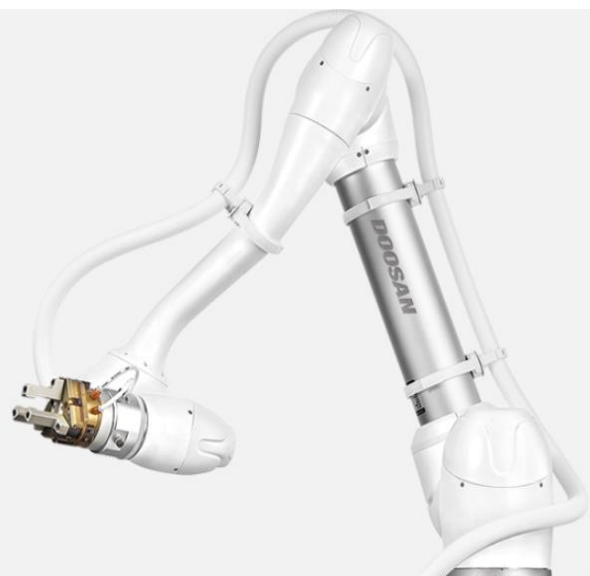



VALUE ADDING *of the* COBOT

DM0617-03

Value-Adding I Enhancer

Robot Jacket

Protects robot from contamination by liquids used during cutter support work, etc. PU coating forms a 2-stage water barrier which ensures Doosan robot to maintain optimum operation conditions.



DM0617-04

Value-Adding I Enhancer

Stain-Resistant Model

The enhanced anti-stain function makes it easy to manage the appearance even in a work environment that is exposed to contamination.

